

VSK321A Smoke Vent Call Point

With status indication and reset





Specifications:

Supply Voltage: 24V DC +/- 20%

Dimensions: 125x125x36mm (WxHxD)

Colour: Orange

Mounting: Surface mounting

Features: • Easy installation and operation

No special key required for service access

• Breakable glass for emergency operation (replaceable)

• Full status indication of a single zone control panel

• Compatible with most single zone control panels

• Possible smoke detector connection at call point location

• Monitored cable with end of line terminator (jumper selected)

 Terminals numbered and sequenced to match the SVM control panel (still compatible with other panels)

Description:

The VSK321A was designed for easy installation in standard smoke control systems. The possibility of including the smoke detector connections from the call point also provide a more advanced scenario than most other systems. The updated terminals make following installation diagrams even easier.

No special key or tool required for gaining access to the call point for periodic service and maintenance testing, making this a more convenient product for service engineers for the future. Easy installation with clear marked connections, and numbering to match the SVM24 control panel.

Made in the UK RoHS compliant


Revision 1.1 2023

© 2023 Ventlux Ltd sales@ventlux.co.uk



VSK321A Smoke Vent Call Point

With status indication and reset

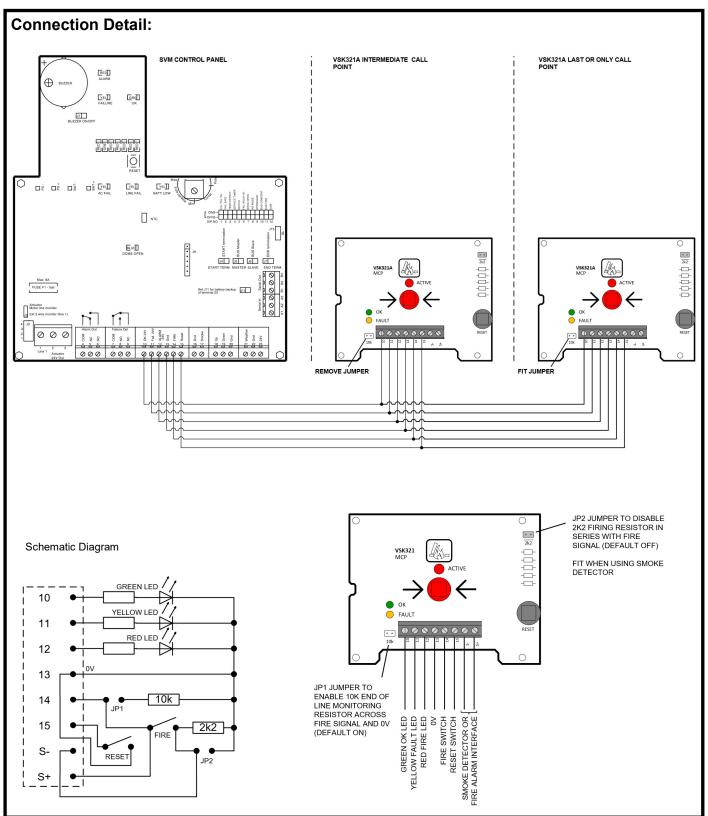

Made in the UK
RoHS compliant

Revision 1.1 2023

© 2023 Ventlux Ltd

sales@ventlux.co.uk